



DS102W

## Features

- Predestined for industrial applications in the harshest environments
- Carbon contact technology
- High operating comfort thanks to our specially developed long-stroke keys
- Key symbols are done by laser etching – abrasion resistant
- Any country variant is possible
- Any customer-specific adaptations can be implemented on request
- LED indicators for displaying the set operating modes
- Electromagnetic compatibility (EMC)
- Available in Black or Pebble Grey (RAL 7032)
- Also available with backlight, integrated finger mouse, in a drawer or as built-in version

## Mechanical Data


- Dimensions of 405 x 185 x 42 mm
- 3,25 mm travel keys with tactile feel
- Operation force 0,65 N
- 102 keys in compact layout
- Ergonomic keycaps
- Durability > 10 million ops.
- Storage temperature -40°C - +70°C
- Operation temperature 0°C - +60°C (optional -20°C - +60°C)
- Protection IP65

## Electrical Data

- Connection options: USB 2.0 or PS/2
- Power supply + 5 V/DC, 30 mA (backlit: 440 mA)
- 2-key rollover
- Autorepeat
- CE Compliant
- RoHS/Reach Compliant

  
control touch trust

# Drawing

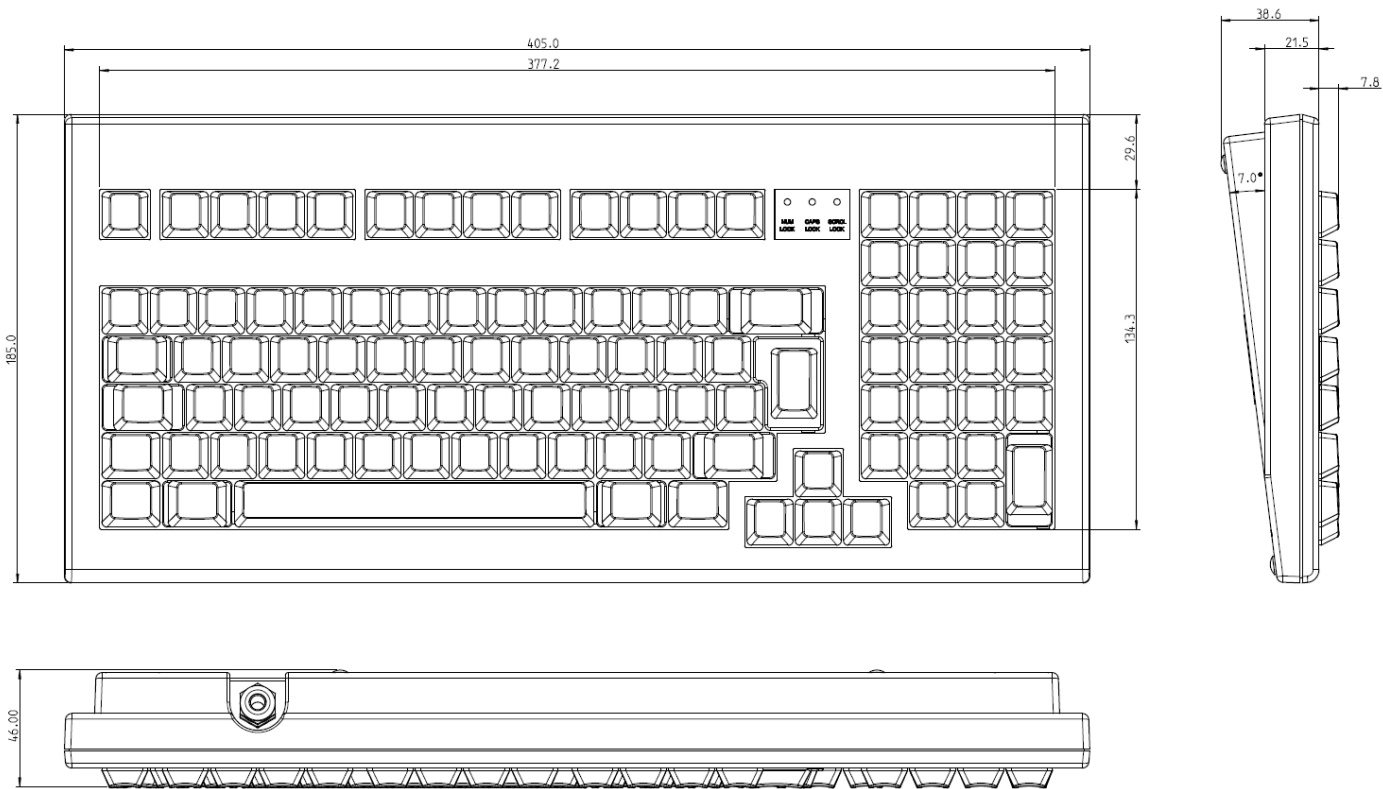

# Versions



**DS102W**

- Standard housing



**DS102W 19 Zoll-6HE**

- 19" 16HE Front panel



**DS102W HL**

- With backlit keycaps



**DS102W Drawer**

- Drawer keyboard



control touch trust



**DS102W M**

- With finger mouse