
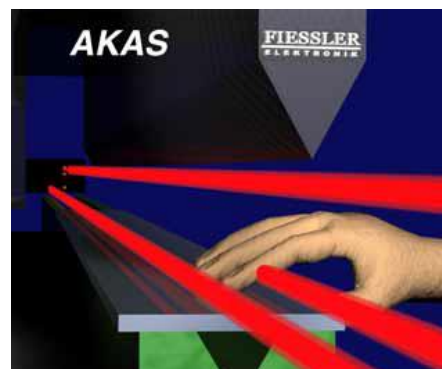


AKAS II LC

Bezpečnostní brzdový systém AKAS® poslední generace, retrofit aplikace pro ohraňovací lisy.

FISSLER
ELEKTRONIK

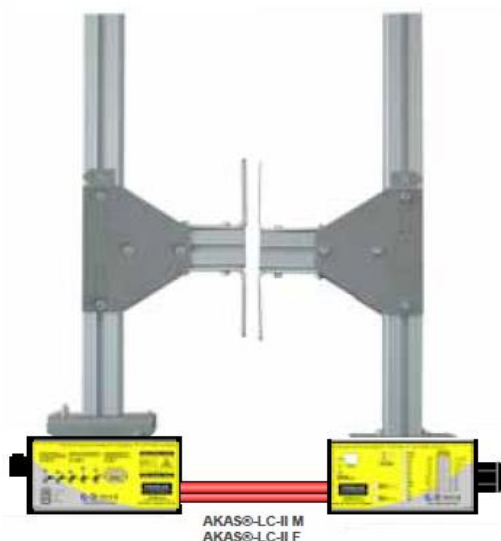

Nové retrofit kity – AKAS II M/F

Rychlejší odezva systému a zkrácení reakčních časů



Nový Akas Muting systém – AMS3

Typ 4
EN 61496

Manuální nastavení, po změně nástroje



FPSC-kontrolér - bezpečnostní PLC s. 4 čítačové vstupy




Méně komponentů pro instalaci



Méně kabeláže k instalaci

contra

Průvodce výběrem systému AKAS® - kity pro dodatečnou montáž dle hydraulického systému a řídicího systému ohraňovacího lisu

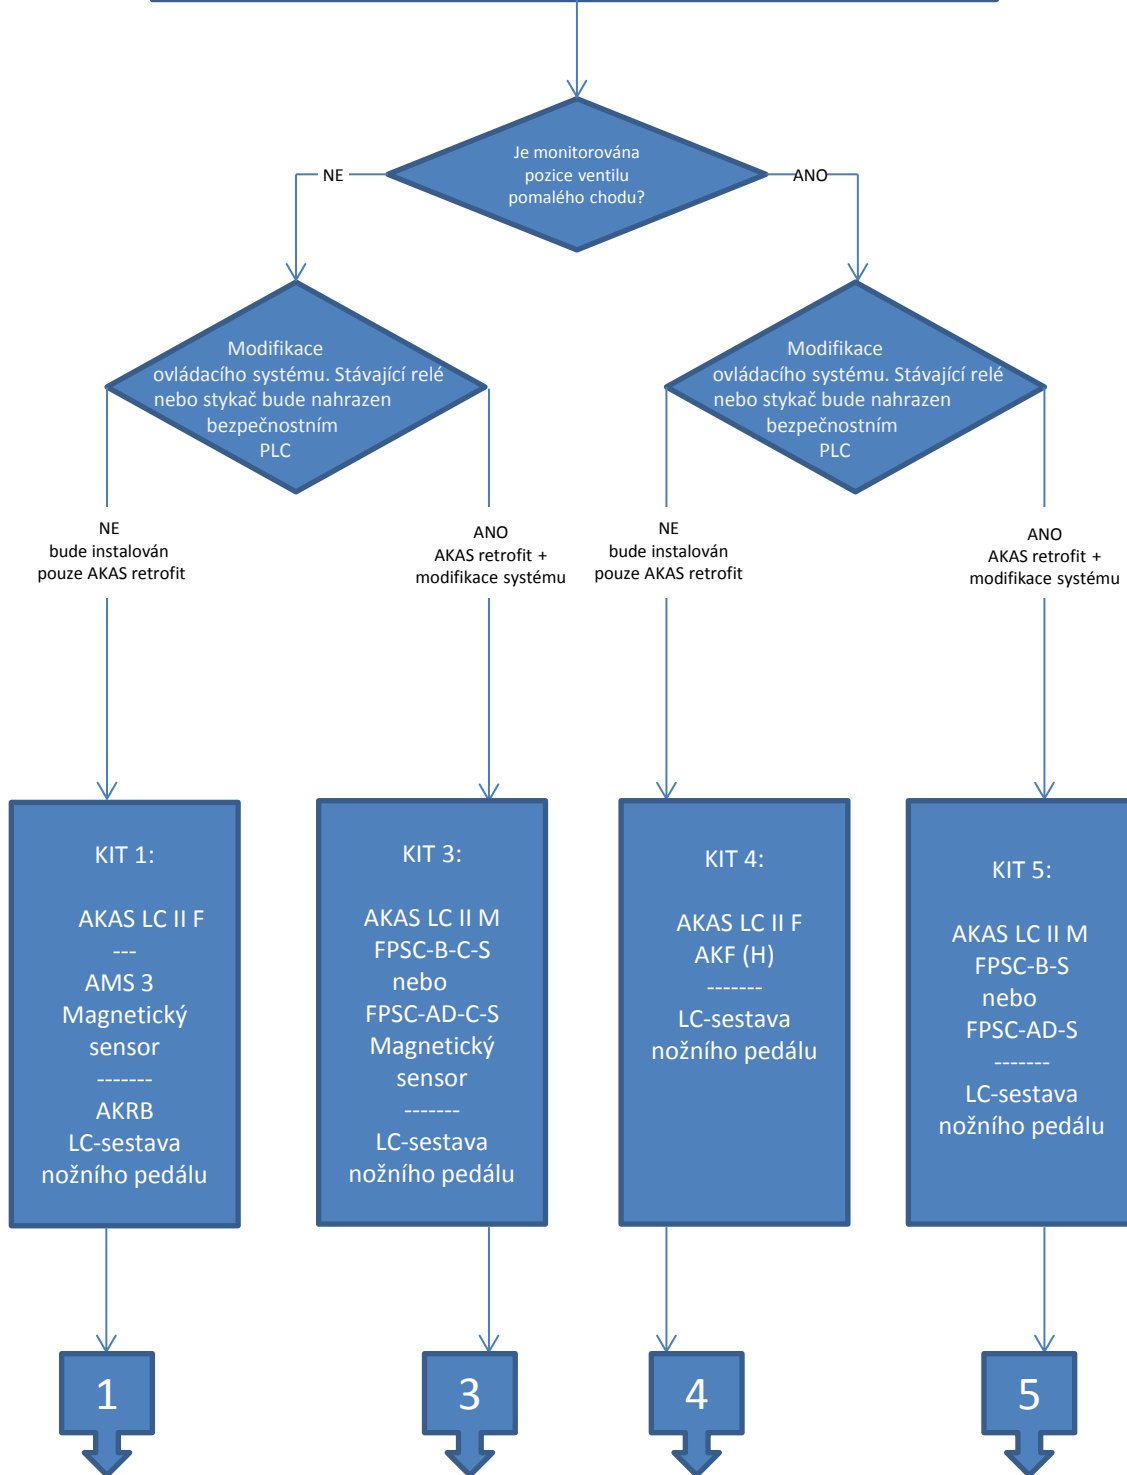

Zabezpečení ohraňovacích lisů

AKAS version	additional control units	sensors	Muting lamp	cut-off of valves by:	holder	box bending function by:
AKAS LC II F retrofit kit 1	AMS 3	magnet tape sensors	---	AKRB	LC-holder	foot pedal
AKAS LC II M retrofit kit 2	FPSC-B-C-S or FPSC-AD-C-S B = basic version AD = expandable with I/O modules	magnet tape sensors	integrated in AKAS LC II F	---	LC-holder	foot pedal
AKAS LC II F retrofit kit 3	AKF(H)	---	integrated in AKAS LC II M opt. external connectable on FPSC	Cut-off of the valves directly by FPSC	LC-holder	foot pedal
AKAS LC II M retrofit kit 4	FPSC-B-S or FPSC-AD-S B = basic version AD = expandable with I/O modules	---	integrated in AKAS LC II F	Cut-off of the valves by AKFH	LC-holder	foot pedal
			integrated in AKAS LC II M opt. external connectable on FPSC	Cut-off of the valves directly by FPSC		

position monitoring of the slow speed valve
yes, existing
no, not existing

1

3

4

5